

Ultrasonic Cleaner Driver

USC-DRV-10



MicroLOGIX
Embedded Controls (P) Ltd.


Driver Features

- ★ 40-45 Watts of Power to drive Transducer
- ★ Built-in EMI Filter
- ★ Built-in Timer 6-8.5 Mins
- ★ Adjustable Frequency 40-42±2 Khz using Potentiometer
- ★ Wide Operating Voltage SMPS 150-270V for Control section
- ★ Screw terminals for Input & Output
- ★ High Quality Construction

Driver




Keypad

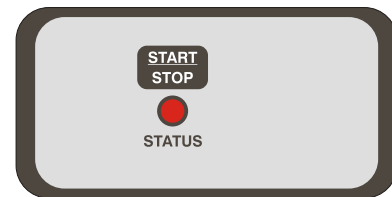

KEYPAD PCB FRONT LAYOUT
Overall PCB Size: 50x16mm

Dimensions

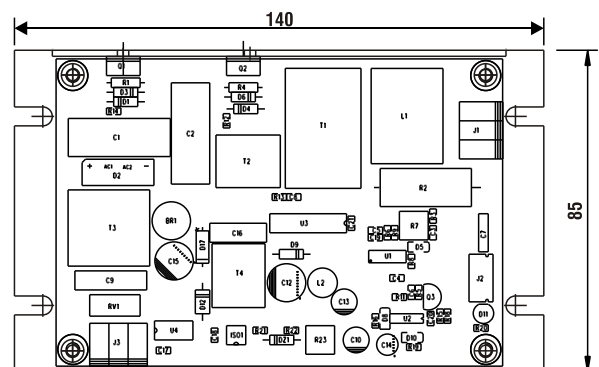

DRIVER PCB
Overall Height : 40mm



Note: Features and Specifications can be customised for OEM's.

USC-DRV-10